

8

7

6

5

4


3

 $\mathbb{Z}$

1

NOTICE OF PROPRIETARY RIGHTS

This document contains confidential technical data, including trade secrets and proprietary information, which is the property of Fluid Components International LLC (FCI). Disclosure of this data to you is expressly conditional upon your assent that its use is limited to use within your company only (and does not include manufacture or processing uses). Any other use is strictly prohibited without prior written consent of FCI.


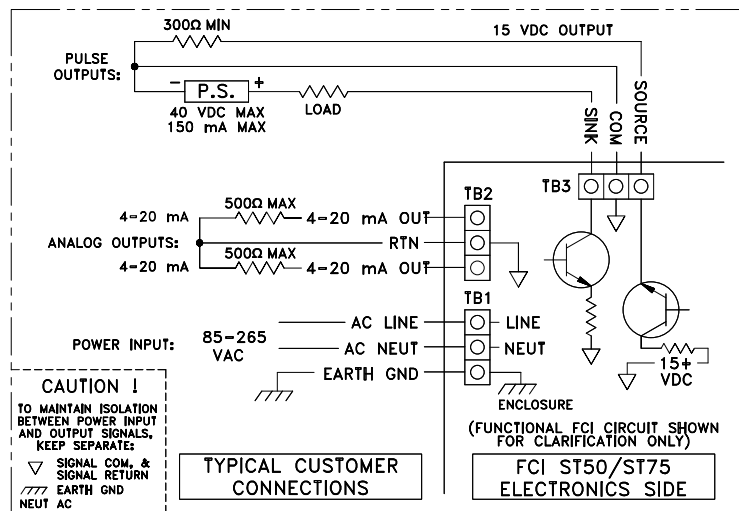


AC WIRING DIAGRAM
DUAL 4-20mA

CALIBRATION TABLE

LINE SIZE: .25 INCH		SCHED OR ID: 40 (.364 ID)		
PROC. FLUID (COMPOSITION %MOLE/MASS): HYDROGEN				
STD CONDITIONS: 25°C, 14.7 PSIA		TEMP COMP: DEFAULT		
	NORMAL	MIN	MAX	UNITS
FLOW	42	1,875	125	SCFH
TEMP	20	0	50	°C
PRESSURE	125	30	150	PSIG
OUTPUT #1: FLOW		OUTPUT #2: TEMP		
OTHER: VORTAB FLOW CONDITIONER				

NOTES: UNLESS OTHERWISE SPECIFIED

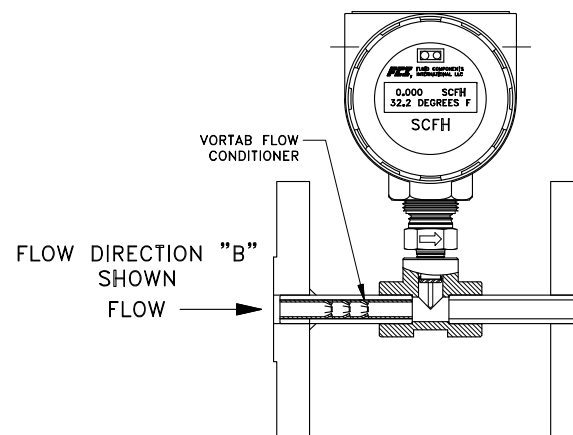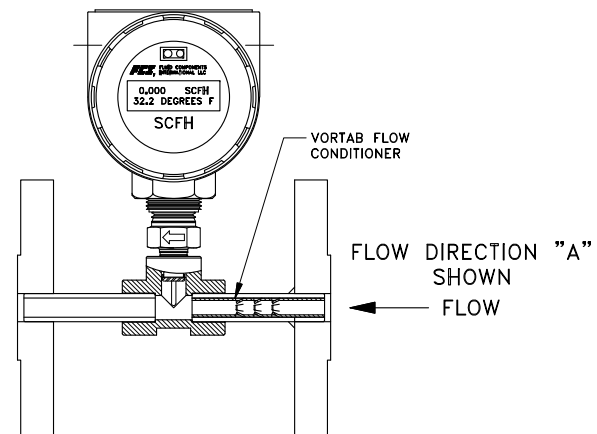

D

C

B

A

D

C

B

A

SIZE D	CAGE CODE 64818	DWG NO. 021299	REV E
		SCALE NONE	SHEET 2 OF 2

8

7

6

5

4

10

2

1